701 S Ridge Avenue, Troy, OH 45374 1-888-4HOBART • www.hobartcorp.com

FP400 FOOD PROCESSOR

STANDARD FEATURES

- Gear transmission.
- Anodized aluminum housing.
- Two-speed motor.
- Triple hopper/cover interlock.
- Two stationary front legs and two rear legs with casters for ease of mobility.
- Processes up to 88 lbs. per minute.
- Plate speeds 200 and 400 RPM.

ACCESSORIES

- □ 3-pack plates (1/16", 5/32" slicer plates, 3/16" shredder plate and wall rack).
- □ 6-pack plates (same as 3-pack plus ¾", ⅓2" slicer plates, ¾" dicer plate and additional wall rack).
- □ 3-peg wall rack (designed to hold 3 plates).
- ☐ Stainless steel accessory cart.
- ☐ Adjustable height stainless steel lug cart.
- Stainless steel pan.
- ☐ Plastic pan.
- ☐ Over 40 individual plates available.

*NOTE: The ¾ dicer grid or the 1" dicer grid should be used with the ¾6 slicer plate only.



MODEL

☐ FP400-1 (Must also select Feed Hopper Choice)

FEED HOPPER CHOICES

☐ Manual/Tubular Cylinder – PFD-CYL

Choose one or both:

- Manual Push Feed Assembly MNLPFD-HANDLE
- ☐ Tubular Feeder TUBE-FEED
- □ Bulk Feed Hopper and Cylinder FEED HOPPER (Complete).

Specifications, Details and Dimensions on Reverse Side.







FP400 FOOD PROCESSO

FP400 FOOD PROCESSOR




701 S Ridge Avenue, Troy, OH 45374 1-888-4HOBART • www.hobartcorp.com

SPECIFICATION: 2 H.P. two speed motor, 200/400 RPM, anodized case aluminum housing. Plates are interchangeable with FP350 and are constructed of stainless steel blades with aluminum frames.

ELECTRICAL SPECIFICATIONS: 208-240/60/3, 7.5 amps, 6 foot, 3 conductor power cord (16 AWG). Furnished with NEMA L15-20P locking type plug.

WEIGHT: Net Lbs.: Machine 119 lb., Feed Cylinder 13 lb., Manual Push Feeder 11 lb., Continuous Feed Hopper 27 lb.

DETAILS AND DIMENSIONS

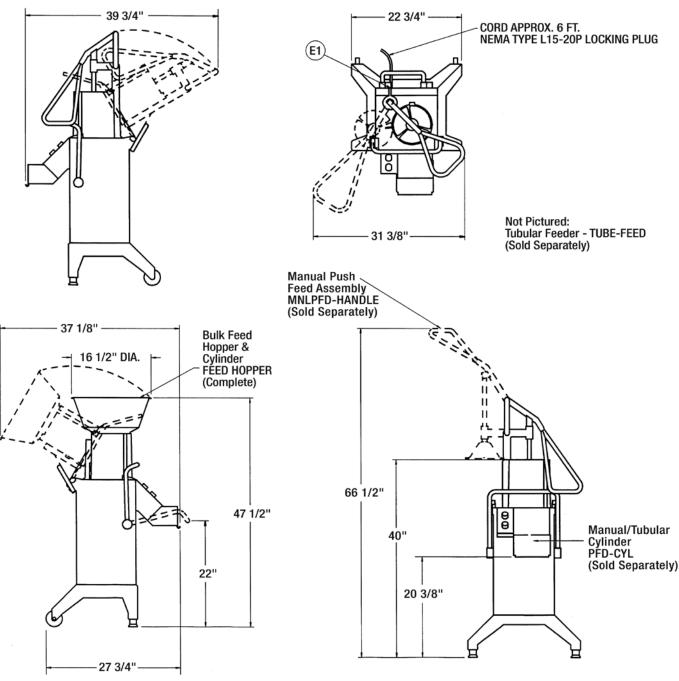

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.