



Nitron consistently dispenses Cold Brew without sacrificing quality. The keg-free design makes Nitron the ideal platform for delivering authentic Cold Brew taste without the need for a complex or lengthy brewing process. The two-tap design on the Standard Nitron dispenses one Still and one Nitro-infused beverage. Further options include ball-valve and Scholle connectors, as well as configurations for All-Nitro taps and Removable Graphic Doors.



# All-Nitro Need more than

Need more than one Nitro tap? The All-Nitro model infuses beverages with micro-bubbles from both taps enabling Nitron to quickly serve high volume demands.



## Removable Graphic Door

Swapping the marketing panel on the front of the machine is a simple process with the Removable Graphic Door models. The front panel allows for easy removal and installation of graphics without tools, allowing your Nitron to promote your current menu.





#### **Keg Free**

Achieve a nitro infusion with no kegs to change-out, store, clean or sanitize! Uses concentrate BIBs or BUNN refillable containers that your staff is already familiar with. Each BIB yields multiple gallons of finished drinks.

## **Customizable Styling**




Have your own taps and graphics? The chrome-plated brass tap handles and the LEDlighted door graphics (on RGD models) can be swapped to reflect your unique brands and beverage offerings.

### Narrow Footprint

Cold Brew Coffee, Iced Coffee, or Iced Tea - all from a sleek 10-inch wide footprint.



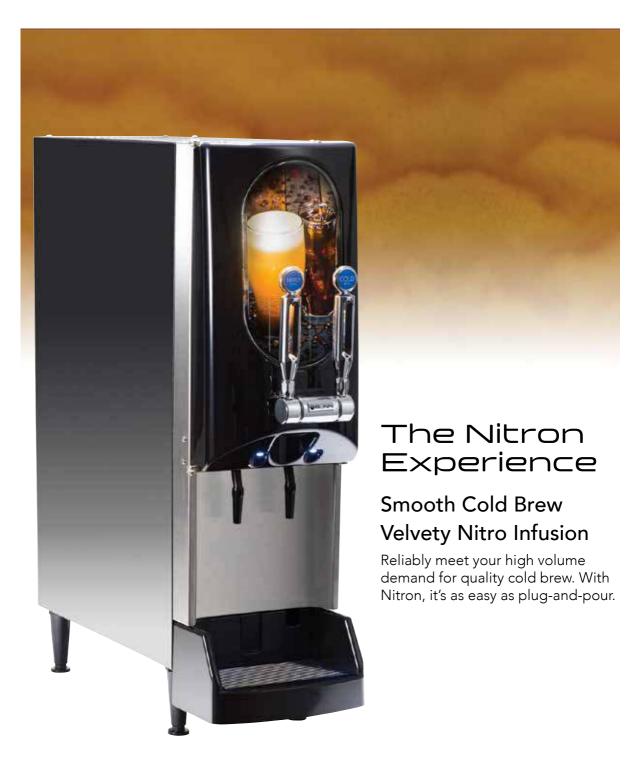



**Proven Technology** – Leveraging BUNN's consistent and reliable High Intensity<sup>®</sup> mixing chamber assures a perfectly blended finished beverage, cup-after-cup.

\*Results based on product concentrate used

#### **MODELS**

MATERIAL	Metal Housing and Stainless Steel
FLOW RATE	1.0oz - 1.5oz per second
GAS	Food-Grade Nitrogen Required
VENTILATION	6" Back and top
MINIMUM WATER INLET PRESSURE	30 PSI
MAXIMUM WATER INLET PRESSURE	90 PSI
WATER SUPPLY CONNECTION	3/8" MFL
N2 GAS INPUT CONNECTION	1/4" Male Flare Bulkhead
MINIMUM N2 INLET PRESSURE	120 PSI
MAXIMUM N2 INLET PRESSURE	130 PSI
ICE BANK	8 lbs
HIGH PRESSURE N2 REGULATOR	125 PSI Maximum Output



#### **Dimensions:**

10" W x 28.4" D x 34" H (254mm W x 721.36mm D x 863.6mm H)

#### **Burst Capacity:**

At a rate of one 12oz drink per minute, dispenses 60 drinks before exceeding 41°F (75°F incoming water)



(required for use with tanks - US Only)

Product #: 54060.0000

51600.0011 All-Nitro All Black 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0016 Nitro/Still All Black 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0018 Nitro/Still Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0020 Nitro/Still Removable Graphic 4:1 - 12:1 Scholle 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18)  Europe, Middle East and Africa (EMEA) 51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (18)	Product #	Model	Door Type	Concentrate Ratio	Connector	Volts	Amps	Watts	Hertz	Phase	Plug	Cord Attached	Agency
51600.0011 All-Nitro All Black 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0016 Nitro/Still All Black 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0018 Nitro/Still Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0020 Nitro/Still Removable Graphic 4:1 - 12:1 Scholle 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18)  Europe, Middle East and Africa (EMEA) 51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (18)	US Market												
51600.0016 Nitro/Still All Black 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0018 Nitro/Still Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0020 Nitro/Still Removable Graphic 4:1 - 12:1 Scholle 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18)  Europe, Middle East and Africa (EMEA) 51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (19)	51600.0009	Nitro/Still	All Black	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) (M.).
51600.0018 Nitro/Still Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0020 Nitro/Still Removable Graphic 4:1 - 12:1 Scholle 120 4.5 540 60 1 NEMA 5-15p Yes (18) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (18)  Europe, Middle East and Africa (EMEA) 51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (18)	51600.0011	All-Nitro	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) (M.).
51600.0020 Nitro/Still Removable Graphic 4:1 - 12:1 Scholle 120 4.5 540 60 1 NEMA 5-15p Yes (KS) 51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (KS)  Europe, Middle East and Africa (EMEA)  51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (CA)	51600.0016	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0022 All-Nitro Removable Graphic 4:1 - 12:1 Ball Valve 120 4.5 540 60 1 NEMA 5-15p Yes (KS)  Europe, Middle East and Africa (EMEA)  51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes	51600.0018	Nitro/Still	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	(NSF) (M).
Europe, Middle East and Africa (EMEA)  51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes	51600.0020	Nitro/Still	Removable Graphic	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0024 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 EURO Yes (	51600.0022	All-Nitro	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
	Europe, Middle East and Africa (EMEA)												
	51600.0024	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	230V	6	500	50/60	1	EURO	Yes	Œ
51600.0025 Nitro/Still All Black 4:1 - 12:1 Ball Valve 230V 6 500 50/60 1 UK Yes	51600.0025	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	230V	6	500	50/60	1	UK	Yes	Œ