

TRUE FOOD SERVICE **EQUIPMENT, INC.**

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name:	AIA #
Location:	
Item #: Qty:	SIS #
Model #:	

Model:

TPP-67D-4

Food Prep Table: Drawered Pizza Prep Table



TPP-67D-4

- True's pizza prep tables are designed with enduring quality that protects your long term investment.
- Oversized, environmentally friendly (R134A) forced-air refrigeration system holds 33°F to 41°F (.5°C to 5°C).
- Complies with and listed under ANSI/NSF-7.
- All stainless steel front, top and ends. Matching aluminum finished back.
- Stainless steel, patented, foam insulated flat lids keep pan temperatures colder, lock in freshness, and minimize condensation.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- Each drawer accommodates two (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) pans (sold separately).
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).



ROUGH-IN DATA

 $Specifications \ subject \ to \ change \ without \ notice.$ Chart dimensions rounded up to the nearest \%" (millimeters rounded up to next whole number).

		Pans	Cabinet Dimensions (inches) (mm)						NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Drawers	(top)	L**	D†	H*	HP	Voltage	Amps		(total m)	(kg)
TPP-67D-4	4	9	671/4	321/4	35¾	1/3	115/60/1	8.6	5-15P	7	545
			1709	820	909	1/3	230-240/50/1	4.1		2.13	248

** Length does not include 1/4" (7 mm) each side for cutting board brackets and thumb screws.

† Depth does not include 1" (26 mm) for rear bumpers and 3" (77 mm) for cutting board. * Height does not include 6¼" (159 mm) for castors or 6" (153 mm) for optional legs.

▲ Plug type varies by country.

MADE IN TOUR COMMENT C		APPROVALS:	AVAILABLE AT:
SINCE 1945 USA			
7/15	Printed in U.S.A.		

TPP-67D-4

Food Prep Table:

Drawered Pizza Prep Table



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pan rail and cabinet interior.
- Forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/NSF-7.
- Condensing unit accessed from behind front removable panel, slides out for easy maintenance.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and ends. Matching aluminum finished back.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- Insulation entire cabinet structure and drawer facings are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter stem castors. 36" (915 mm) work surface height.

DRAWERS

- Stainless steel exterior drawer facings and liners. Stainless steel drawer frames.
- Each drawer fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic drawer gaskets of one piece construction, removable without tools for ease of cleaning.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Each drawer accommodates two (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) food pans (sold separately). Drawer will support varying pan configurations with pan dividers bars (drawer pans and divider bars optional).

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Extra-deep 19 ½" (496 mm), full length removable cutting board included. Sanitary, high-density, NSF approved white polyethylene provides tough preparation surface.
- Stainless steel, patented, foam insulated flat lids keep pan temperatures colder, lock in freshness, and minimize condensation.
- Refrigerated pan rail comes standard with nine (½size) 12 ¾ "L x 6 ¼ "W x 6"D (324 mm x 159 mm x 153 mm) NSF approved clear polycarbonate insert pans.
- NSF-7 compliant for open food product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES


Upcharge and lead times may apply.

- 230 240V / 50 Hz.
- \square 6" (153 mm) standard legs.
- ☐ 6" (153 mm) seismic/flanged legs.
- ☐ 4" (102 mm) diameter castors.
- ☐ 3" (85 mm) diameter castors.
- ☐ 2½" (64 mm) diameter castors.
- ☐ Garnish rack.
- ☐ Single overshelf.
- ☐ Double overshelf.
- □ 19½" (496 mm) deep, ½" (13 mm) thick, composite cutting board.
- Pan dividers.
- ☐ Exterior round digital temperature display (factory installed).

*CABINET INTERIOR

Beginning in October of 2014, True Manufacturing began the process of changing the standard interior finishes on select products. The interior liners of these units have changed from the traditional NSF-approved white aluminum to an NSF-approved clear coated aluminum that is silver in color. In addition, the traditional white PVC coated shelves have been switched to a gray PVC coating. There are no functional differences created by any of these changes, the difference is only in the appearance. The following product lines are affected by this change: T-Series, TUC, TWT, TSSU, TFP, TPP, TMC, TRCB. A sticker will be placed on the outside packaging so that units with this change can be identified in inventory.

PLAN VIEW

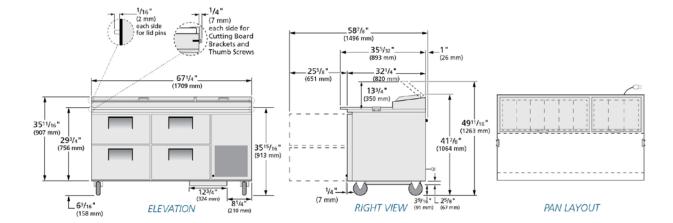

WARRANTY*

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure or other damages resulting from installation in non-commercial or residential applications.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL	Model	Elevation	Right	Plan	3D	Back
	TPP-67D-4	TFQY42E	TFQY70S	TFQY42P	TFQY423	

TRUE FOOD SERVICE EQUIPMENT